




## DisplayPort™ to HDMI® (Ultra-HD, 4K) Converter

The ANX7737 is a DisplayPort (DP) to HDMI (up to Ultra-HD, 4K using HBR2.5) converter, which includes 3D display delivery capability. It is designed to interoperate with any other DisplayPort enabled transmitter, with a maximum resolution of Full-HD including 3D display, in smartphones, tablets, Ultrabooks, sports cameras, camcorders, and set top boxes. ANX7737 can support up to HBR2.5 in conjunction with an Analogix 4K transmitter. ANX7737 transforms the DisplayPort output of a source device to HDMI or DVI output so that the device can connect to any high-definition TV, monitor, or projector.

## **Features**

- Standard compliance
  - DisplayPort, HDMI, HDCP
- DisplayPort receiver
  - 1-lane DisplayPort1.2 input with link speed of RBR (1.62Gbps), HBR (2.7Gbps), HBR2 (5.4Gbps), and HBR2.5 (6.75Gbps)
  - Advanced WideEye™ SerDes technology capable of receiving data over long and low quality cables
  - Stereo (3D) video support
  - HDCP content protection
- HDMI transmitter
  - Supports all HDMI 1.4b 4K resolutions, in conjunction with an Analogix 4K transmitter, including 3840x2160@30Hz and 4096x2160@24Hz video formats
  - Up to 36bpp color depth support at Full-HD

- 3D video output support for all HDMI 1.4b 3D modes
- Remote control support through Consumer Electronics Control (CEC)
- HDCP version 1.4 and 2.2 pass-through content protection
- System operation
  - On-chip Microcontroller (OCM)
  - Slave I<sup>2</sup>C device control interface
  - Master I<sup>2</sup>C device control interface available on DisplayPort CONFIG signals
  - Built-in video test pattern generator
- Power requirements
  - 1.0V and 1.8V power supplies
- Package offered: 64-pin QFN, 8mm x 8mm, 0.4mm pin-pitch
- RoHS compliant and Halogen free package

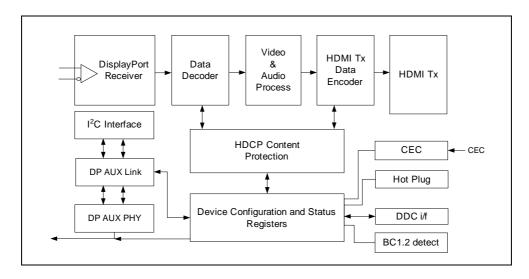

AA-003251-PB-1 June 2015





## **Related Products**

Part Number	Description
ANX7750	DisplayPort Converter (4K@30Hz) with 1-lane DisplayPort1.2a input
ANX9837	DisplayPort Converter (WQXGA, 2560x1080@60Hz) with two-lane high-speed differential input at 5.4Gbps, 2.7Gbps, or 1.62Gbps

Copyright ©2015 Analogix Semiconductor, Inc. 3211 Scott Blvd., Suite 103 Santa Clara, CA 95054, USA +1 (408) 988-8848

http://www.analogix.com/

©2015 Analogix Semiconductor, Inc. All Rights reserved.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS" WITHOUT ANY EXPRESS REPRESENTATIONS OF WARRANTIES. IN ADDITION, ANALOGIX SEMICONDUCTOR INC. DISCLAIMS ALL IMPLIED REPRESENTATIONS AND WARRANTIES, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTURAL PROPERTY RIGHTS.

This document contains proprietary information of Analogix Semiconductor, Inc. or under license from third parties. No part of this document may be reproduced in any form or by any means or transferred to any third party without the prior written consent of Analogix Semiconductor, Inc.

The information contained in this document is not designed or intended for use in on-line control of aircraft, aircraft navigation or aircraft communications; or in the design, construction, operation or maintenance of any nuclear facility. Analogix disclaims any express or implied warranty of fitness for such uses.

Analogix Semiconductor, Inc., the Analogix Logo, and WideEye $^{TM}$  SerDes, and Slim**Port**® are trademarks of Analogix Semiconductor, Inc., in the United States and other countries.

HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

DisplayPort and the DisplayPort logo are trademarks or registered trademarks of the Video Electronics Standards Association, VESA®.

USB and the USB logo are trademarks or registered trademarks of USB Implementers Forum, Inc., creators of USB technology.

All other trademarks and registered trademarks are the property of their respective owners.

AA-003251-PB-1 2/2